




# Sony Xperia Z5 LCD Screen Replacement

Here shows how to replace Sony Xperia Z5 LCD Screen assembly.

Written By: Lenka

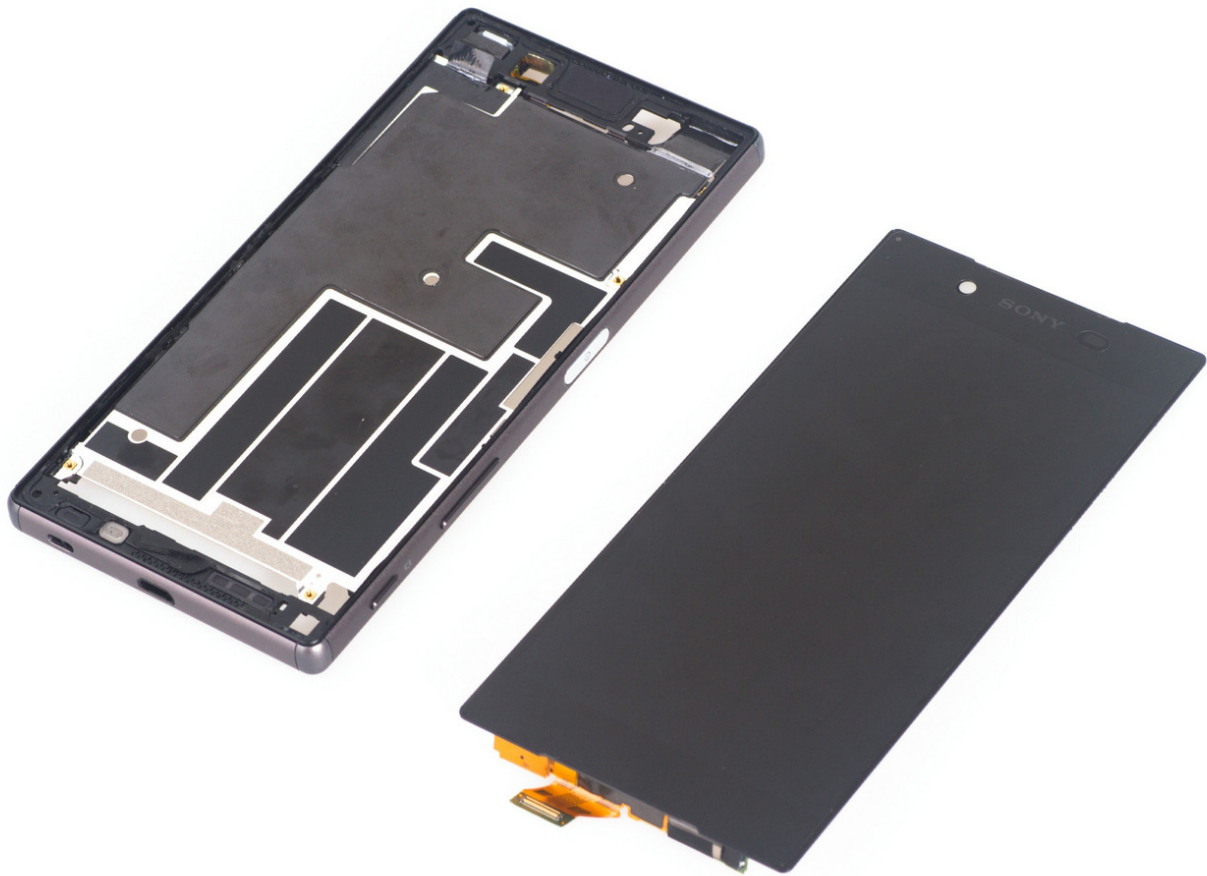

## INTRODUCTION

This video shows how to replace and reassemble Sony Xperia Z5 LCD display.

[video: <https://www.youtube.com/watch?v=MF9dcmbQhIE>]



### TOOLS:

- [Heat Gun](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)
- [Heavy-Duty Suction Cups \(Pair\)](#) (1)



### PARTS:


- [Sony Xperia Z5 LCD Screen and Digitizer](#) (1)
- [Sony Xperia Z5 Display Adhesive Strips](#) (1)
- [Sony Xperia Z5 Back Cover Adhesive](#) (1)
- [Sony Xperia Z5 LCD Screen and Digitizer Full Assembly](#) (1)

## Step 1 — LCD Screen



- Remove SIM card tray.

## Step 2

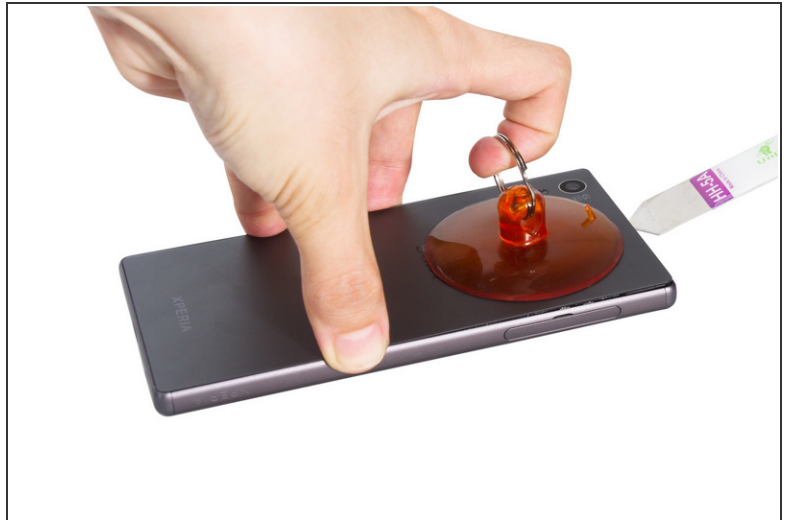


- Heat the back cover to soften the adhesive sticker.
- Place the suction cup and insert metal opening tool to open a gap from top side.

## Step 3



- Insert the guitar pick and slide it to cut the adhesive sticker underneath.
- Remove back cover.

## Step 4

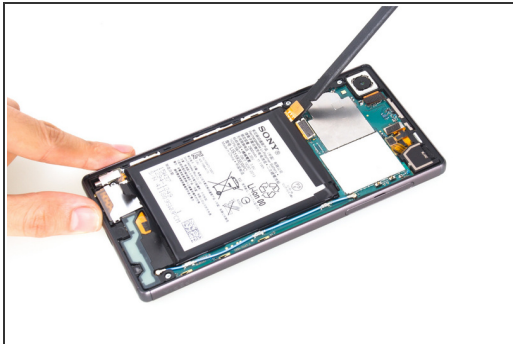

- Release battery connector.
- Pull off the adhesive tape underneath the battery.
- Pry up battery.

## Step 5




- Release rear camera connector, front camera connector, audio jack connector and main flex connector on the motherboard.
- Twist off screws there.
- Remove that rubber securing bracket.

## Step 6



- Remove metal cover and twist off two screws.
- Loosen the bottom side of main flex assembly.

## Step 7

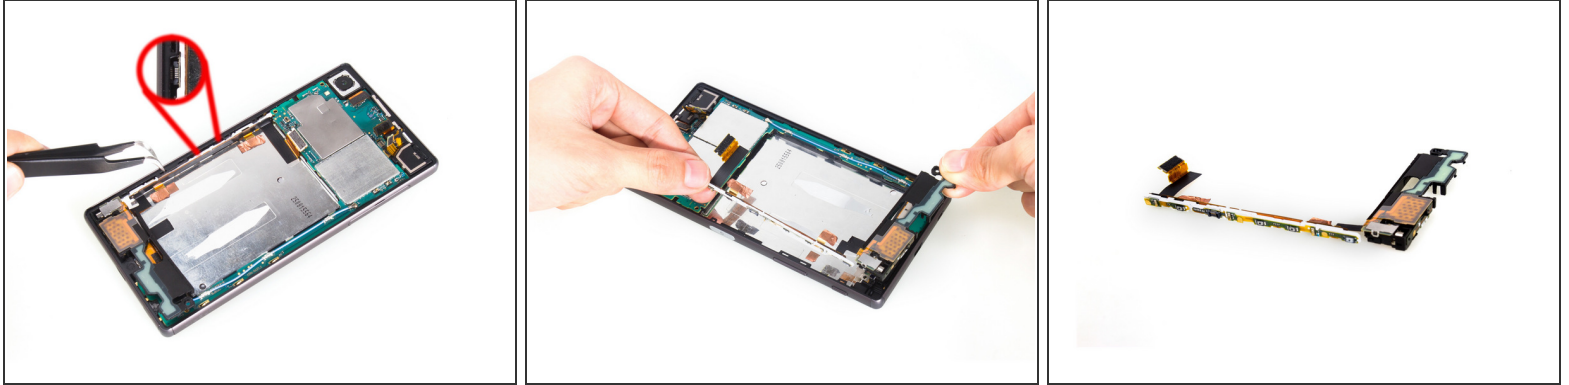

- Loosen side button contactors ( Attention: the fingerprint sensor is here, be careful to loosen it), then remove the whole main flex assembly.

## Step 8



- Remove rear camera.
- Remove that securing bracket, then remove front camera.



## Step 9



- Release LCD screen flex connector, charging port connector, microphone connector here.
- Remove motherboard.

## Step 10



- Remove charging port flex.

## Step 11



- Remove microphone.



## Step 12



- Remove the metal bracket covering on the LCD screen flex.




## Step 13

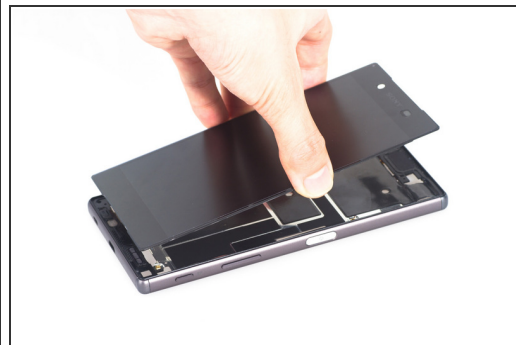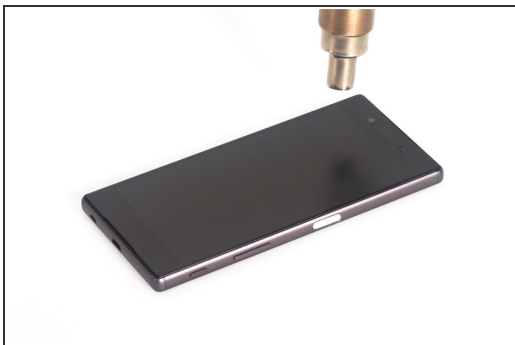

- The sticker underneath is strong, so use heat gun to soften it for a few minutes.
- Remove LCD screen carefully.

## Step 14

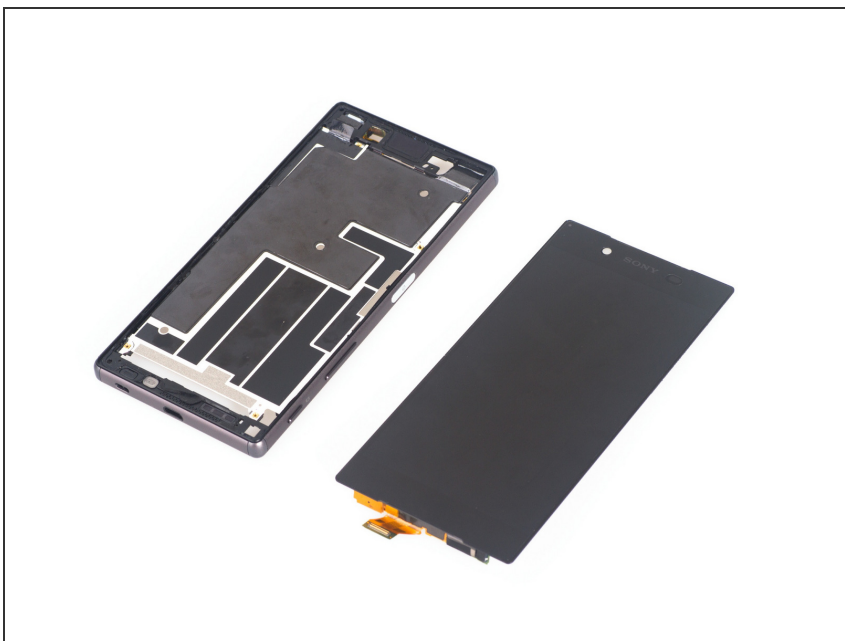

- Done.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-11-30 08:16:44 PM.